



Bild 1: Elstein MSH/20 micro system radiator

Elstein MSH micro system heaters are ceramic infrared radiators in small design. They reach operating temperatures up to 860 °C and surface ratings up to 100 kW/m².

MSH micro system heaters are used in applications, which require partial heating or drying of small goods and areas. This occurs for example at heating of printed circuit boards.

MSH radiators are suitable both for individual operation and for configuring groups of radiators to an infrared heating panel.

In this way small heating panels can be built, which can be adapted to the requirements of the heating task or the size of the material to be heated regarding heated area, dimensions and the acuteness of the heating zones.

MSH/20



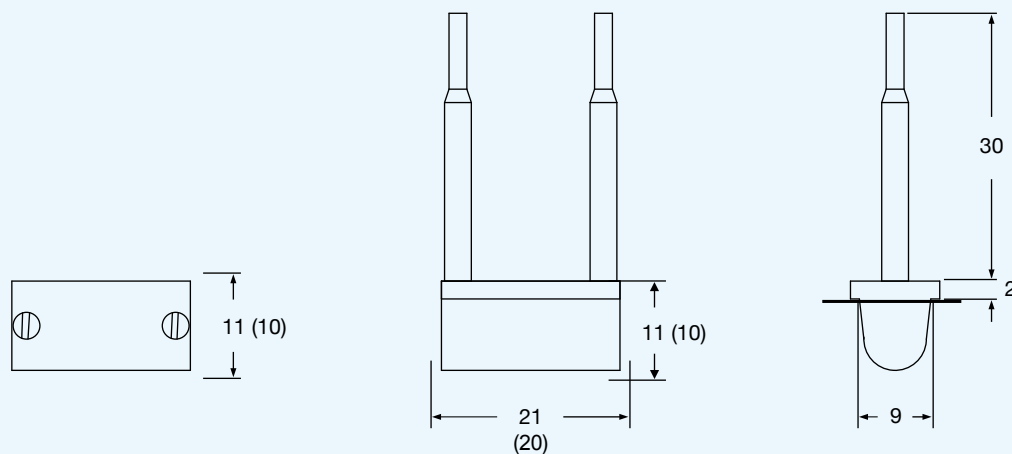


Figure 2: Mounting dimensions and radiator dimensions () in mm

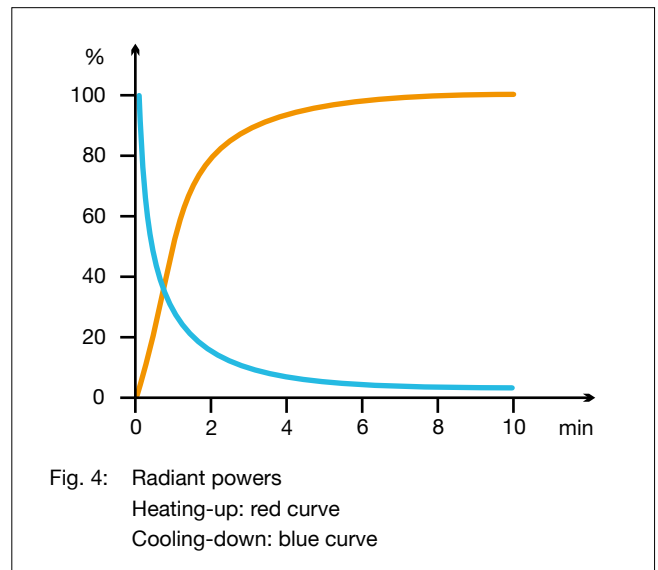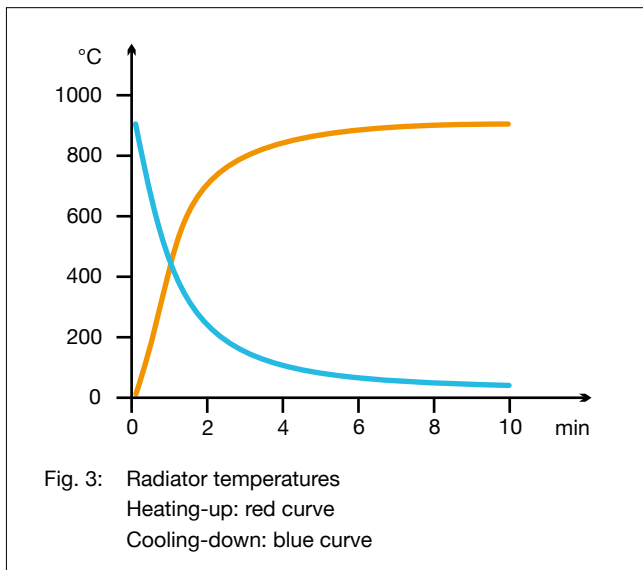

Type, weight, wattage	MSH/20	3 g	55	W
Surface rating			100	kW/m ²
Typical operating temperature			860	°C
Maximum permissible temperature			900	°C
Wavelength range			2 - 10	µm

Standard design	Thermocouple radiators	Variants
Operating voltage 12 V Ceramic full-pour casting Black glaze Leads 30 mm	Designation T-MSH/20 Integrated thermocouple Type K (NiCr-Ni) TC leads 30 mm	Special wattages Special voltages Extended leads Leads with ring terminals

The power can be controlled using thermocouple radiators together with TRD 1 temperature controllers, TSE thyristor switching units and other accessories.

The national safety regulations must be complied with for the respective application, for example, the IEC or EN standard 60519-1, Safety in electrical heating installations.

Further information and safety information are given in the mounting instruction enclosed with each radiator.